

Power-on	Alert Tone	Display	GPS/Ranging	VFO Scan	Auto repeater	Record	Volume/Audio
Work Mode	Vox	STE	FM	Power Save	Key Function	Other	Digital Fun

Other

TOT	Off
TOT Penalty Time[s]	Off
Frequency Step	5K
SQL Level(A)	Off
SQL Level(B)	Off
TBST	1000Hz
Select TX-Contact	On
Analog Call Hold Time[s]	0
call channel is maintained	Off
Reset	Off
Forbid Setup Menu	Off

Priority Zone A	Off
Priority Zone B	Off
Forbid Book	Off
Forbid Zone	Off


OK

Cancel


DJMD5 update

* DJMD5 Update mode


Turn on the power while pressing PF1 and PF2
Indicator blinks in red

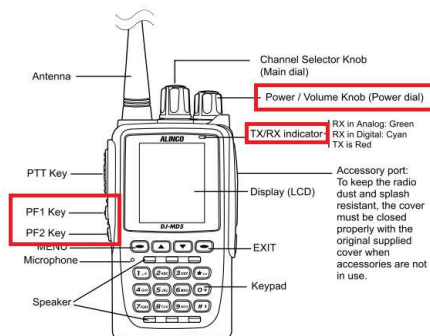

* Firmware update tool

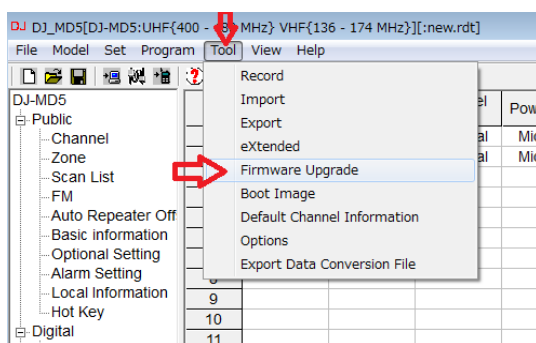

Please open "spi" file

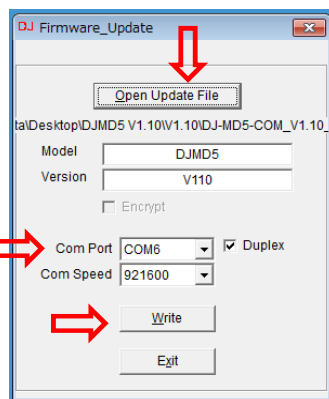

After connecting the radio,
please select COM port

Click "Write" to write

Never turn off the radio while updating. Also please use a fully charged battery

After updating, the radio restarts automatically

* Confirmation after updating

Follow the steps below to check the Firmware version

- 1 Press the menu key (Green key) to enter the main menu
- 2 Select "settings" using up / down keys
- 3 Select "3 Device Info"
- 4 Confirm "Firmware Ver" using down key

